

HRC Rail

Counterbore from above. Cut to length acc. to request. Rails can be joint together for extra long lengths. Contact Rollco for more information.

Dimensions in mm.




General Data


Designation	Length (mm)	Weight Rail (g/m)	
HRC15	4000 1290		
HRC20	4000 2280		
HRC25	4000	3020	
HRC30	4000 4380		
HRC35	4000 6790		
HRC45	4000	10530	
HRC55	4000	14000	

Rollco Norge AS • Industrigata 6 • 3414 Lierstranda • Norge Tel. +47 32 84 00 34 • info@rollco.no • Org.nr 984 962 983 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Dimensions





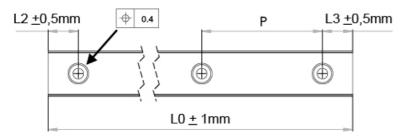

Designation	H1	W1	D x d x g1	Hole Pitch (P)
HRC15	15	15	7.5 x 4.5 x 5.3	60
HRC20	20	20	9.5 x 6 x 8.5	60
HRC25	23	23	11 x 7 x 9	60
HRC30	27	28	14 x 9 x 12	80
HRC35	32	34	14 x 9 x 12	80
HRC45	39	45	20 x 14 x 17	105
HRC55	45.7	53	24 x 16 x 20	120

Rollco Norge AS • Industrigata 6 • 3414 Lierstranda • Norge Tel. +47 32 84 00 34 • info@rollco.no • Org.nr 984 962 983 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.