


TB40

Timing belt conveyor with end drive. Can be used as a single unit or as a system with up to ten synchronized timing belt conveyors in width. Options as cleats, false teeth or coated belt. Stand 100% compatible with conveyor available as an option. Inclination or declination of $\pm 10^\circ$ is possible. For dimensions outside our standard range, please contact Rollco.

Note: Please see load/speed diagram for current values. Use our CAD configurator to design your timing belt conveyor according to your preferences and get a visual view, download data sheet and CAD files.

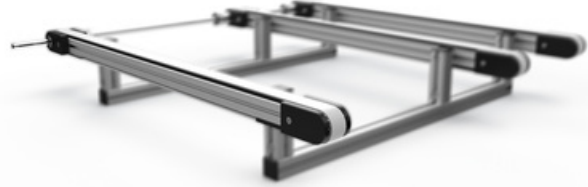

TB40 and TB80 have been extensively tested over its full performance range of speeds, loads, and lengths, together with our standard drive units.

Declaration of installation of partly completed machinery according to Directive 2006/42/EC Annex II 1B.

Dimensions in mm.



Speed (m/min): up to 32

Drive side: Left/Right


No. of parallel units: Up to 10 pcs

Incline/decline: $\pm 10^\circ$

System load: Up to 150kg

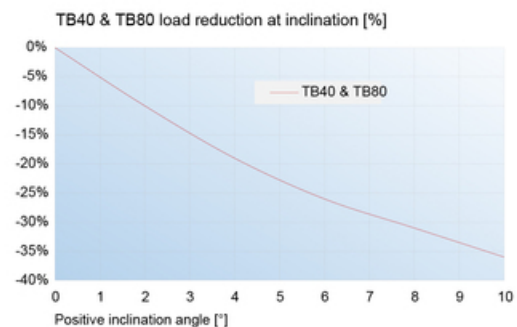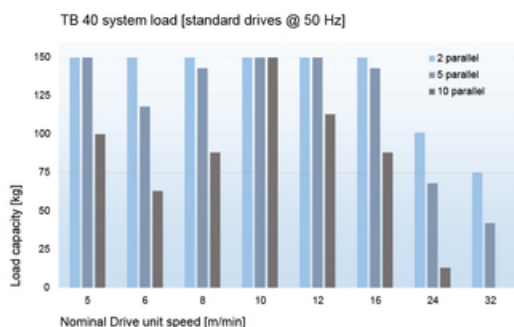

General Data

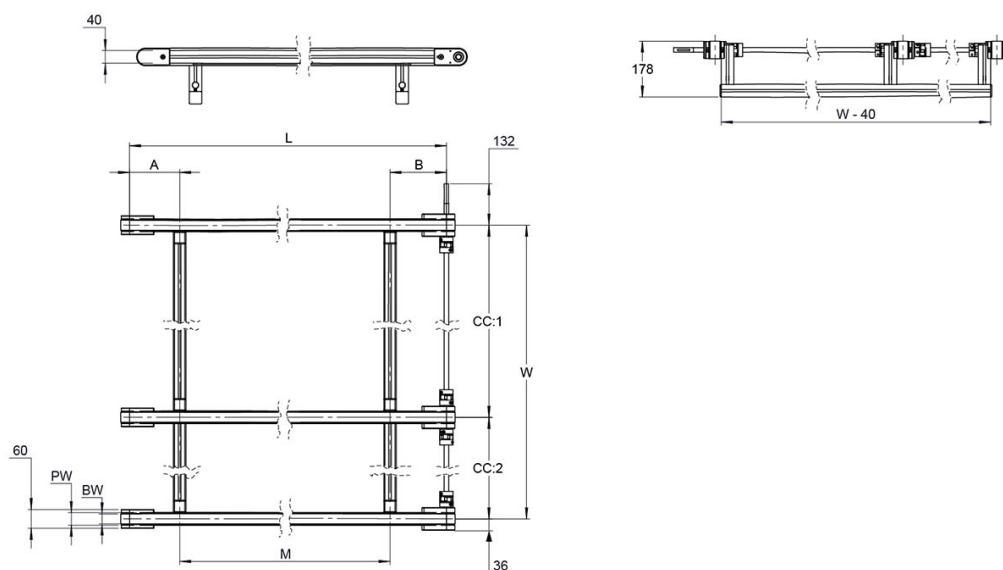

Designation	Profile Width (PW)	Profile Height	Belt Width (BW)	Total Length (L)	Total Width (W)
TB40	40	40	32	max 6000	max 6000

Designation	CC	No. of parallell units	A	B	M
TB40	max 1500	1-10	130-300	130-200	160-800