

## Swivel Castors, Bolt Hole with Lock

Housing made of Polyamide, precision ball bearing in swivel head, bolt hole.

Wheel centre made of Polyamide.

Tread made of Polyurethane, precision ball bearing.

Standard: EN 12530

Hardness of tread: Shore A 92

**Material:** Polyamide



**System:** 40 - Slot 8; 30 - Slot 6; 20 - Slot 5

**Temperature range (°C):** -10° to +40°

**Type:** Castors





PZ1543

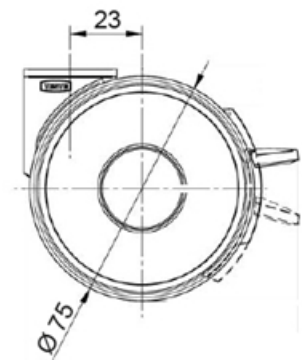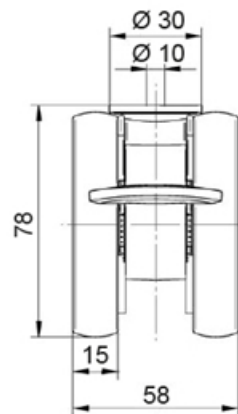

PZ1543



PZ1540

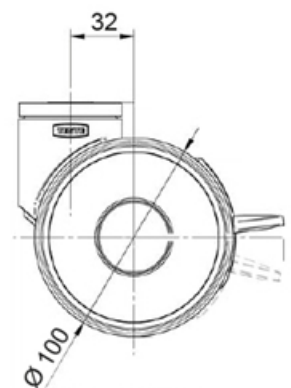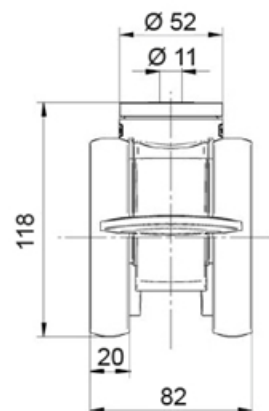


PZ1540

## Swivel Castors, Bolt Hole with Lock



PZ1544

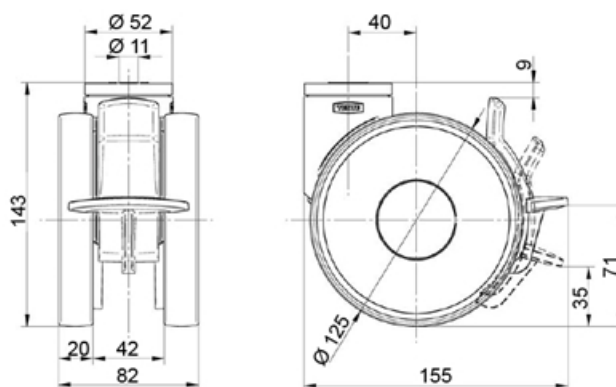

PZ1544

## General Data

Designation	Description	Colour	Weight (g)	Swivel Interference (mm)	Load Capacity (kg)
<b>PZ1543</b>	Swivel castor with wheel brake, bolt hole	RAL7001	237	156	90
<b>PZ1540</b>	Swivel castor with total lock, bolt hole	RAL9002	750	216	100
<b>PZ1544</b>	Swivel castor with total lock, kick pedal	RAL9002	743	258	110

Designation	Static Load Capacity (kg)
<b>PZ1543</b>	180
<b>PZ1540</b>	200
<b>PZ1544</b>	220