

Bottom Mounting Rail RMG-B

Rails with holes threaded from the bottom and induction hardened raceways.

Very high load capacity, stiffness and precision.

Dimensions in mm. (According to the DIN 645/I standards.)

Max. Operating Speed (m/s): 3

Max. Acceleration (m/s²): 50

Temperature range (°C): -10 °C to +80

Length (mm): Up to 4000 mm


Material: Hardened steel



General Data

Designation	Weight (kg/m)
RMG55-B	15.2
RMG25-B	3.4
RMG65-B	22.5
RMG35-B	6.5
RMG45-B	10.7

Dimensions

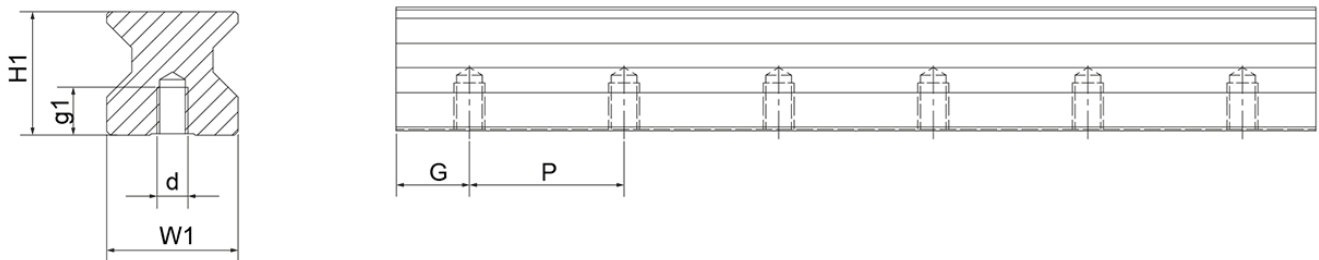

Designation	H1	W1	d x g1	Hole Pitch (P)
RMG55-B	47.8	53	M14 x 22	60
RMG25-B	24.35	23	M6 x 12	30
RMG65-B	55	63	M16 x 25	75
RMG35-B	32	34	M8 x 15	40
RMG45-B	39.85	45	M12 x 19	52.5