# PSS 30 - Shaft 14 mm solid




• Positioning system with IP 65
• Absolute measuring system, without battery
• Galvanically separated supply voltages between control and motor and bus
• Absolute encoder eliminates the need for reference runs during system setup and installation of replacements
• Easy address assignment directly on the device using integrated address switches (not for IO-Link)
• Manual disconnecting lever permits manual disconnection of the gearbox
• Regulation of the current torque prevents overloading and unnecessary run aborts
• Strong breakaway torque enables safe start-up even after an extended standstill
• Intelligent running behaviour. Recognises the difference between obstacles and dirt
• Spindle offset run: Excludes inconsistencies due to lash in the spindle
• Condition monitoring of supply voltage, drag error (permits optimum adjustment of current position), power consumption and torque
• Partial safety function for STO (Safe Torque Off)


Dimensions in mm.

Contact us for CAD-files.


**Type:** Horizontal
**Nominal Voltage (V DC):** 24 (± 10 %)
**Nominal Current (A):** 2.4
**Output Shaft (mm):** 14
**Output Shaft Type:** Solid
**BUS Communication:** Can Open (CA); Profi Bus (DP); Device Net (DN); Modbus (MB); IO-Link (IO); ProfiNet (PN); Sercos (SE); EtherCat (EC); Ethernet IP (EI); PowerLink (PL)
**Electrical connection:** "Standard; with jog keys; 1 connector Y-encoded or 1 connector Y-encoded with jog keys"
**Protection Class:** IP65
**Motor:** EC-motor
**Supply Voltage:** 24 V DC ± 10 % galvanically separated between control and motor and bus
**Measurement System:** Absolute, optical-magnetic
**Accuracy:** ± 0.9°
**Intermittence:** 20% (basis time 600 s)
**Manual Adjustment:** Standard
**Brake:** Optional (holding brake)
**Material:** Stainless steel housing. See pdf for details.



Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Performance Curve - Direct Drives PSS

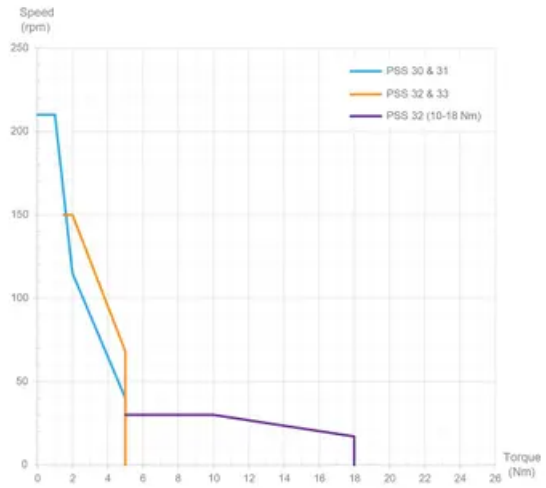


## General Data

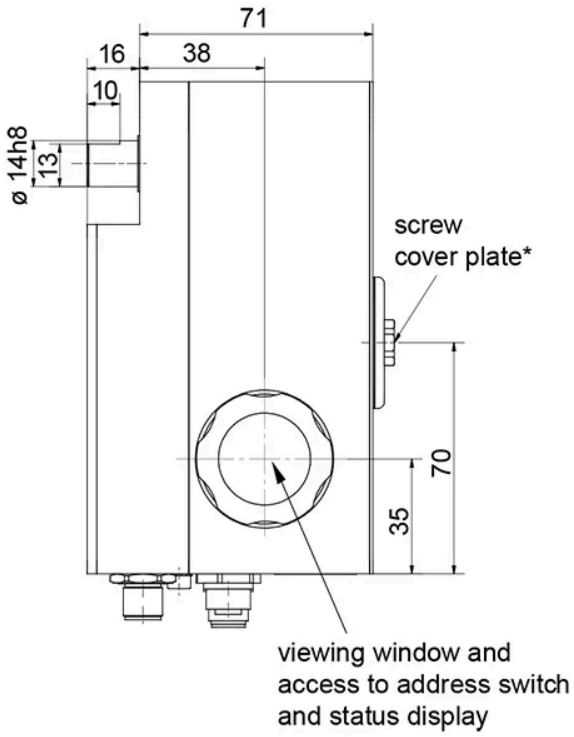

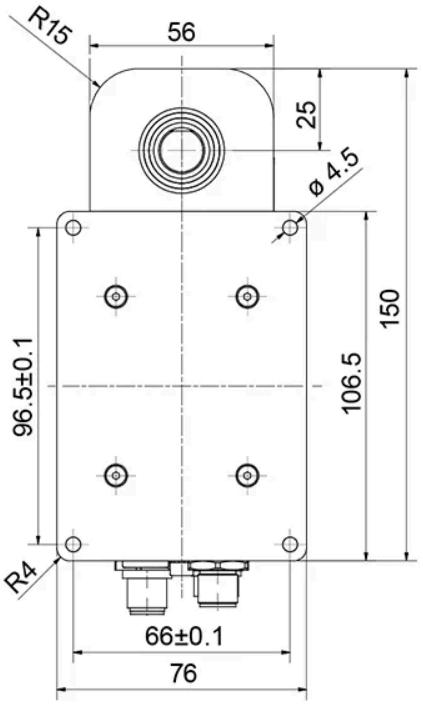
** over a rotating manual adjustment shaft SW 6/8 depth hex*

| Designation | Nominal Torque (Nm) | Nominal Speed (rpm) | Nominal Current (A) | Self-holding Torque (Nm) | Positioning Range (rot.) |
|---|---|---|---|---|---|
| **PSS 301-14V** | 1 | 210 | 2.4 | 0.5 | 250 |
| **PSS 302-14V** | 2 | 100 | 2.4 | 1 | 250 |
| **PSS 305-14V** | 5 | 40 | 2.4 | 2.5 | 250 |


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.