## ROLLCO LINEAR SOLUTIONS YOUR WAY

## UP---.0700

- · Higher wear-resistance
- Fine grained structure
- Easy to weld
- Special machining on request
- Max length in one piece 12 m

Versions of delivery: Standard UP---.0700 Fine straightened style ± 0,3 mm/m UP---.0701 Sandblasted UP---.0702 Sandblasted + fine straightened style UP---.0703

Ordering example: UP 070.0700-2800 U-Profile with inside measurement 70,8 mm, length 2800 mm

Dimensions in mm.

**Material:** 18MnNb 6 with plenty more load capacity by addon of Niob (Nb) and vanadium (V) **Sizes Available:** 60; 70; 80; 90; 110; 120; 150; 180




## **General Data**

Designation	Weight (kg/m)
UP060.0700	10.50
UP070.0700	14.80
UP080.0700	20.90
UP090.0700	28.60
UP110.0700	36.00
UP120.0700	42.80
UP150.0700	52.30
UP180.0700	78.51

Rollco Norge AS • Industrigata 6 • 3414 Lierstranda • Norge Tel. +47 32 84 00 34 • info@rollco.no • Org.nr 984 962 983 Page 2 of 3 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

## Dimensions

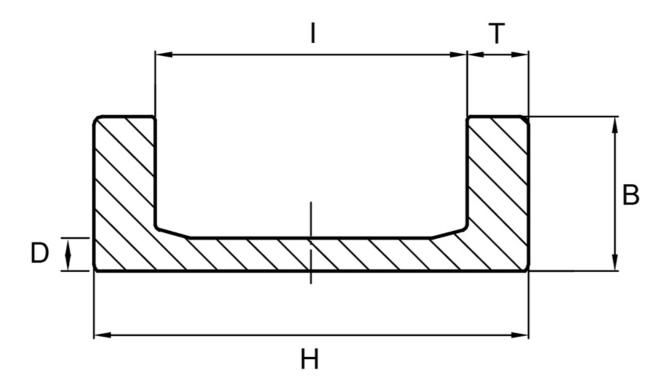

Designation	В	D	н	I	т
UP060.0700	36	7 ±0.5	86.5	62.7 +0.8	12 ±0.5
UP070.0700	40 ±0.8	7.7 ±0.5	103.2	70.8 ±0.5	16.2 ±0.5
UP080.0700	41 ±0.5	10.8 ±0.5	121.3	78.7 ±0.5	21.2 ±0.5
UP090.0700	53 ±0.5	12.7 ±0.5	135.4	89.4 ±0.5	23 ±0.5
UP110.0700	61.2 ±0.8	14 ±0.5	157.2	108.4 ±0.5	24.4 ±0.5
UP120.0700	66.2 ±0.8	16.2 ±0.5	175	123.8 ±0.5	25.6 ±0.5
UP150.0700	71.2 ±0.8	19.4 ±0.5	201.5	150.1 ±0.5	25.7 ±0.5
UP180.0700	90 ±0.6	19.4 ±0.5	252.5	181.1 ±0.6	35.7 ±0.6

Rollco Norge AS • Industrigata 6 • 3414 Lierstranda • Norge Tel. +47 32 84 00 34 • info@rollco.no • Org.nr 984 962 983 Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.