

## DBN22

Full extension consisting of two guide rails, both fixed and movable, and two sliders which together form the intermediate element. The size is similar to the DE series and offers good protection from dirt of the open ballcage.

Special strokes are defined as deviations from standard stroke H. They are each available as multiples of the values in the table below. These values are dependent on the spacing of the ballcage. See Stroke modification in table.


Dimensions in mm.

System Load Capacity Radial and System Load Capacity Axial value refers to a pair of rails.




## Variant Data

DBN22

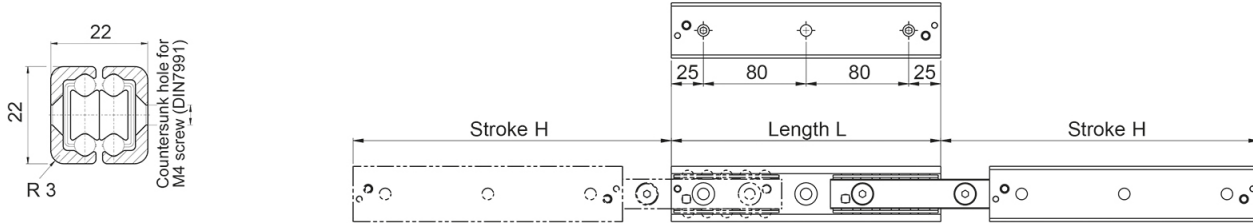

Designation	Length	Stroke	Number of Fixing Holes	Stroke Modification	Weight (kg/m)
DBN22-130	130	152	2	15	2.64
DBN22-210	210	222	3	15	2.64
DBN22-290	290	308	4	15	2.64
DBN22-370	370	392	5	15	2.64
DBN22-450	450	462	6	15	2.64
DBN22-530	530	548	7	15	2.64
DBN22-610	610	632	8	15	2.64
DBN22-690	690	702	9	15	2.64
DBN22-770	770	788	10	15	2.64

## Load & Moment

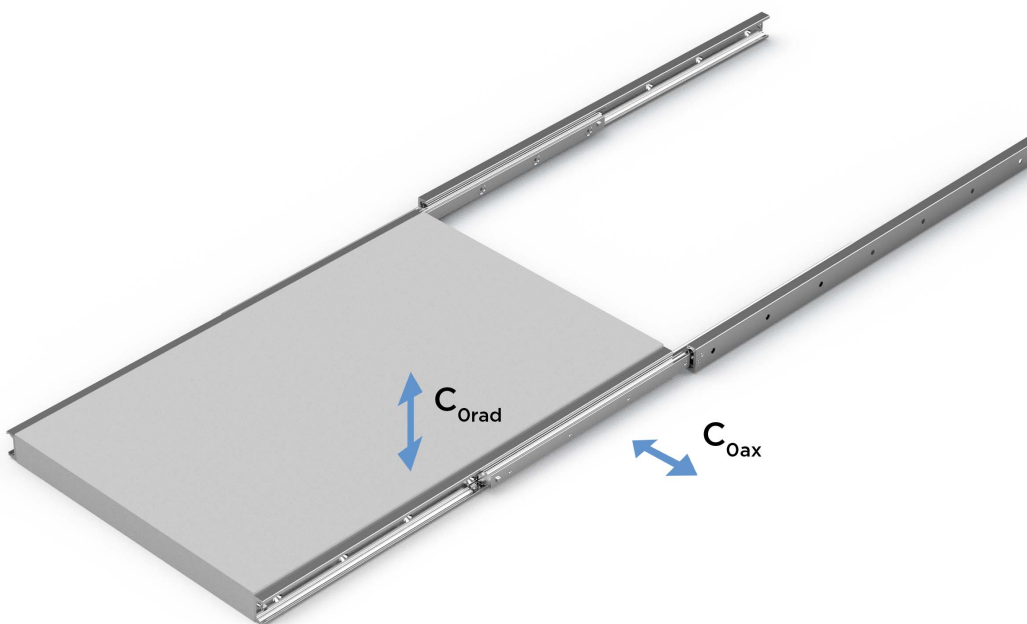

Designation	System Load Capacity Radial (N)	System Load Capacity Axial (N)
DBN22-130	238	166
DBN22-210	562	392
DBN22-290	472	472
DBN22-370	372	372
DBN22-450	324	324
DBN22-530	272	272
DBN22-610	234	234
DBN22-690	216	216
DBN22-770	190	190