

## 410 - 100% Extension

Note: 18 mm dia. holes in centre beam allow easy access to fixing holes. M8 countersunk head screws to BS4183 are recommended for fixing.

All dimensions in mm.


System Load Capacity value refers to a pair of rails.

\* Available on request

**Extension:** 100%



## General Data

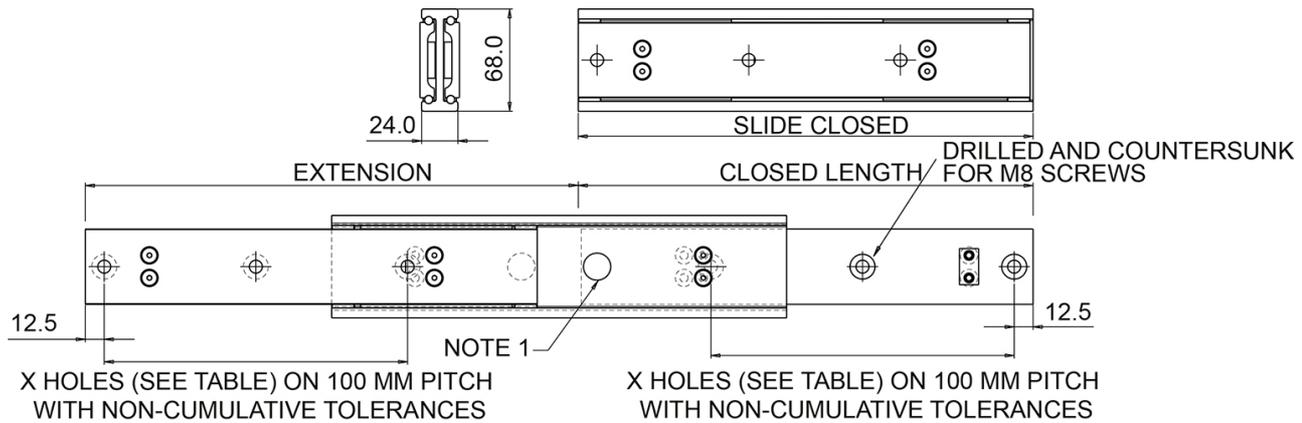

Designation	Closed Length	Extension Length	System Load Capacity (N)	Number of Fixing Holes
410-300	300	325	2900	3
410-350*	350	375	3000	4
410-400	400	425	3100	4
410-450*	450	475	3200	5
410-500	500	525	3300	5
410-550*	550	575	3400	6
410-600	600	625	3400	6
410-650*	650	675	3300	7
410-700	700	725	3200	7
410-750*	750	775	3100	8
410-800	800	825	3000	8
410-850*	850	875	3000	9
410-900	900	925	2800	9
410-950*	950	975	2700	10
410-1000	1000	1025	2500	10