

## Adjustable Foot Ø 136 with anti-vibration pad and fixing holes

### Application:

Height adjustable foot for leveling machines and structures.  
Any tipping is compensated by a ball and striker pad.


Two fixing sets SZ1700V are required for adjustable feet Ø 136.

**Material:** Pad: SVDB steel, zinc-plated; with anti-vibr. pad / fixing holes. Striker pad: POM, black. Spindle & Hexagon nut: Steel, zinc-plated

**Max. Load (kg):** 1300

**System:** 40 - Slot 8

**Type:** Feet

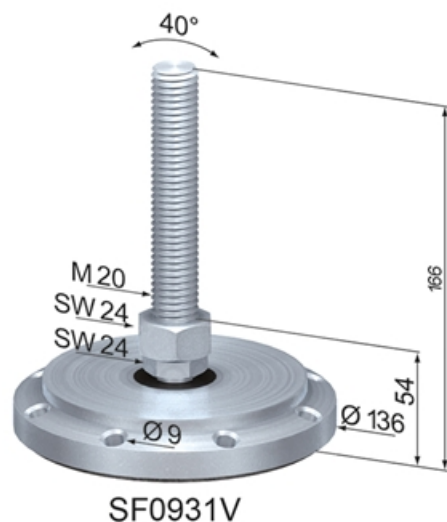

## General Data

| Designation    | Description                             | System      | Hmin (mm) | Weight (kg) |
|----------------|-----------------------------------------|-------------|-----------|-------------|
| <b>SF0822V</b> | Adjustable Foot Ø 136 M16<br>SVDB/L 95  | 40 - Slot 8 | 48        | 2.02        |
| <b>SF0922V</b> | Adjustable Foot Ø 136 M16<br>SVDB/L 166 | 40 - Slot 8 | 48        | 2.11        |
| <b>SF0929V</b> | Adjustable Foot Ø 136 M20<br>SVDB/L 95  | 40 - Slot 8 | 54        | 2.1         |
| <b>SF0931V</b> | Adjustable Foot Ø 136 M20<br>SVDB/L 166 | 40 - Slot 8 | 54        | 2.23        |