Swivel Castors, Bolt Hole

Housing made of Polyamide, precision ball bearing in swivel head, bolt hole.
Wheel centre made of Polyamide.
Tread made of Polyurethane, precision ball bearing.

Standard: EN 12530
Hardness of tread: Shore A 92

Material: Polyamide
System: 40 - Slot 8; 30 - Slot 6; 20 - Slot 5
Temperature range (°C): -10° to +40°
Type: Castors

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

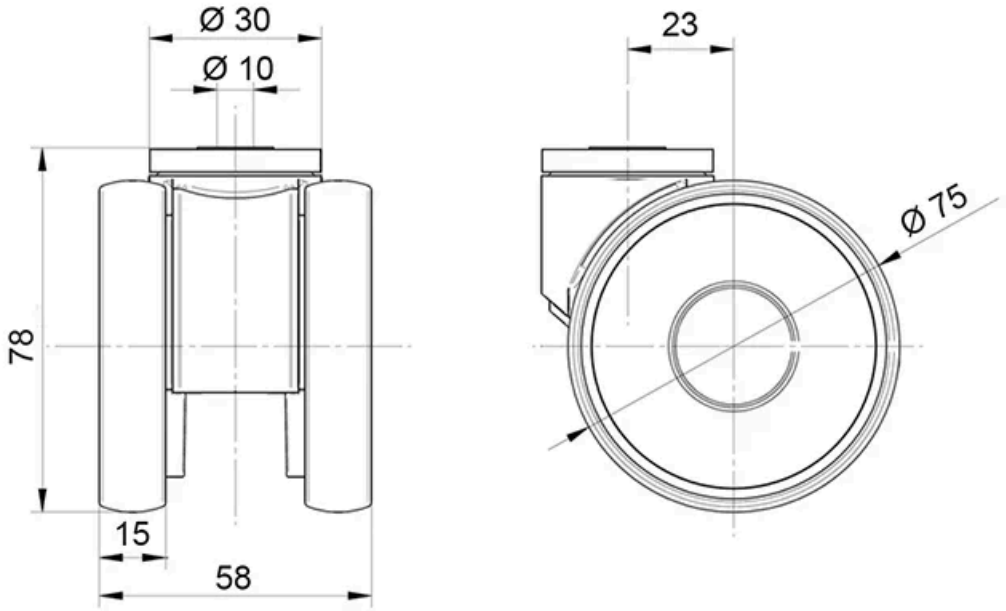

Designation	Description	Wheel Diameter (mm)	Colour	Weight (g)	Swivel Interference (mm)
RA1542	Swivel castor with bolt hole	75	RAL9002	216	121

Designation	Load capacity (kg)	Static Load Capacity (kg)
RA1542	90	180

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.