

## Cellulose




For highly stressed surfaces and panelling. Drilling and tapping in this material is possible. Resin bonded cellulose, hot pressed. Double sided surface coating. Further gauges and colours on request.

We offer a wide range of sheet materials and panels, ideal for building protective walls and doors, workstations etc. This is just a sample of our assortment.


Please contact us for further information about the various materials, specifications and designations. We will help you to find a suitable solution based on your application requirements.

**Material:** Cellulose

**System:** 40 - Slot 8; 30 - Slot 6; 20 - Slot 5

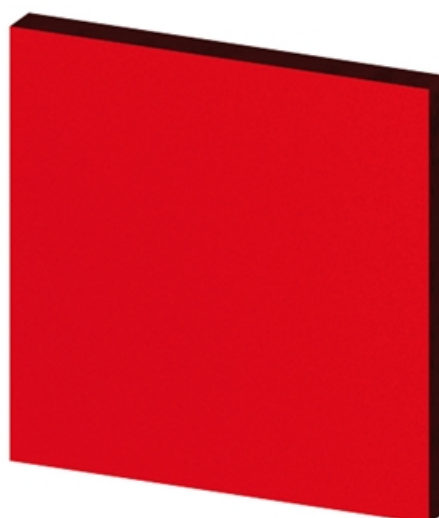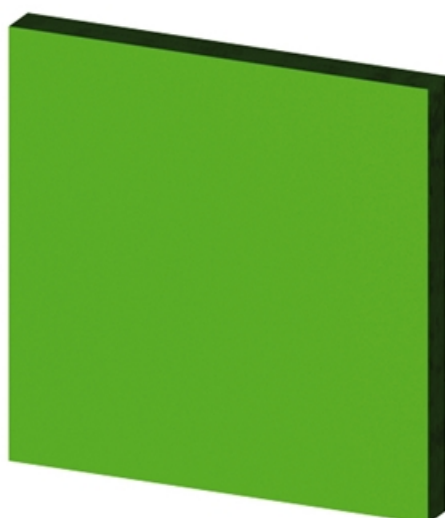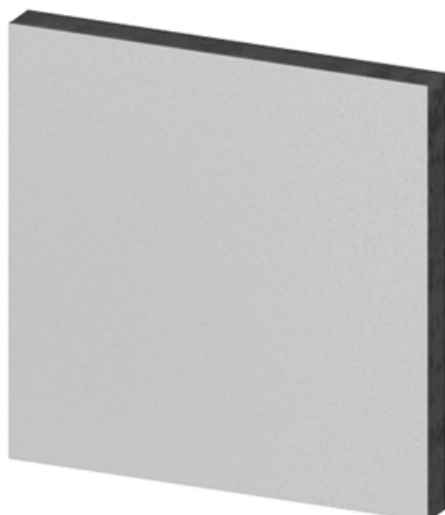

## Cellulose

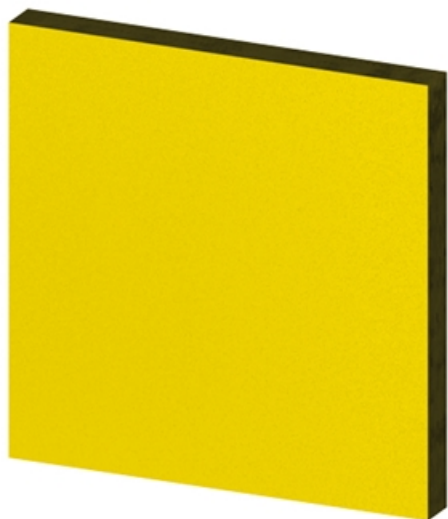

## General Data

| Designation          | Colour     | Dimensions            |
|----------------------|------------|-----------------------|
| Cellulose white      | White      | Max 2750 mm x 2020 mm |
| Cellulose light grey | Light grey | Max 2750 mm x 2020 mm |
| Cellulose grey       | Grey       | Max 2750 mm x 2020 mm |
| Cellulose green      | Green      | Max 2750 mm x 2020 mm |
| Cellulose red        | Red        | Max 2750 mm x 2020 mm |
| Cellulose yellow     | Yellow     | Max 2750 mm x 2020 mm |
| Cellulose blue       | Blue       | Max 2750 mm x 2020 mm |