UP---.0702

- Very high wear-resistance
- Fine grained structure
- Easy to weld
- Special machining on request
- Max length in one piece 12 m



Versions of delivery:
Sandblasted (standard) UP---.0702
Sandblasted + fine straightened style UP---.0703

Ordering example: UP 070.0700-2800
U-Profile with inside measurement 70,8 mm, length 2800 mm

Dimensions in mm.


Material: 18MnNb 6 with plenty more load capacity by add-on of Niob (Nb) and vanadium (V)
Sizes Available: 60; 70; 80; 90; 110; 120; 150; 180

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

Designation	Weight (kg/m)
UP060.0702	10.50
UP070.0702	14.80
UP080.0702	20.90
UP090.0702	28.60
UP110.0702	36.00
UP120.0702	42.80
UP150.0702	52.30

Dimensions

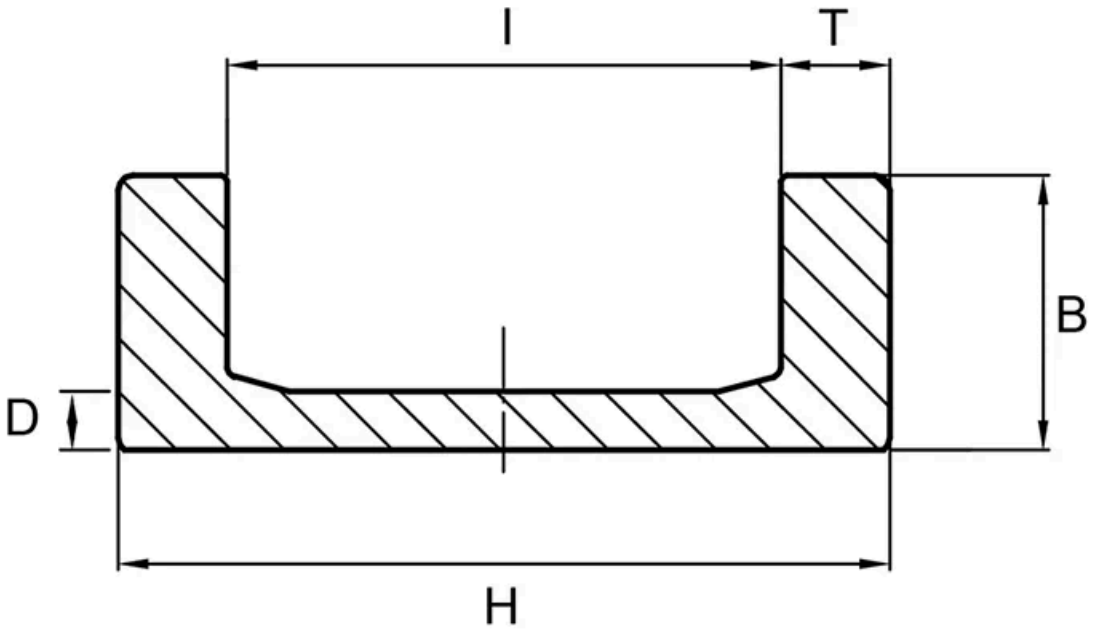

Designation	B	D	H	I	T
UP060.0702	36	7 ±0.5	86.5	62.5 +1	12 ±0.5
UP070.0702	40 ±0.8	7.7 ±0.5	103.2	70.8 ±0.5	16.2 ±0.5
UP080.0702	41 ±0.5	10.8 ±0.5	121.3	78.7 ±0.5	21.2 ±0.5
UP090.0702	53 ±0.5	12.7 ±0.5	135.4	89.4 ±0.5	23 ±0.5
UP110.0702	61.2 ±0.8	14 ±0.5	157.2	108.4 ±0.5	24.4 ±0.5
UP120.0702	66.2 ±0.8	16.2 ±0.5	175	123.8 ±0.5	25.6 ±0.5
UP150.0702	71.2 ±0.8	19.4 ±0.5	201.5	150.1 ±0.5	25.7 ±0.5

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.